


## Bifacial Double Glass Module (Black Pro)

DAS-DH108NE-510



### Key Features

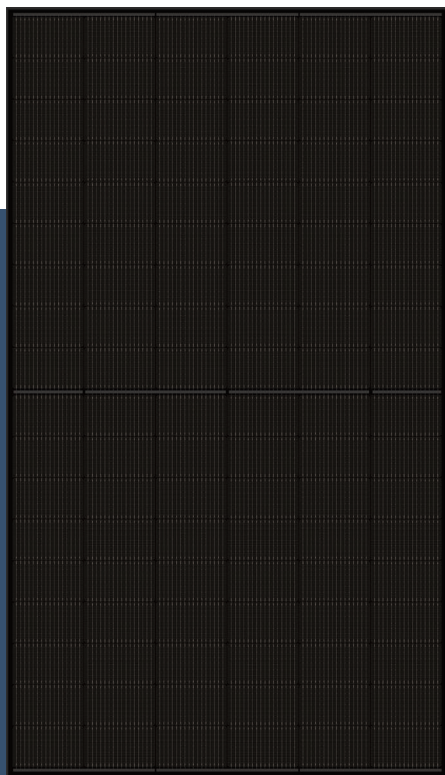

#### High Efficiency

Leading module efficiency in industry, up to 22.9%



#### Excellent Appearance and Performance

Bifacial solar cell, symmetrical design, low risk of micro-crack



#### High Reliability

25 years materials warranty, 30 years power warranty



#### Excellent Rear Side Power Generation

Bifaciality is up to 80%, up to 30% more energy yield than conventional modules



#### Better low irradiance performance

Higher power output even under low irradiance environments like on cloudy or foggy days



#### Extensive Application Scenes

More extensive application scenes, such snow field, vertical installation, high humidity, strong wind and desert region

Maximum Power Output

**510W**

Maximum Module Efficiency

**22.9%**

Power Output Tolerance

**0~+5W**


### Product and Quality Certifications

IEC 61215, IEC 61730

ISO 9001: Quality Management System

ISO 14001: Environment Management System


ISO 45001: Occupational Health and Safety Management System

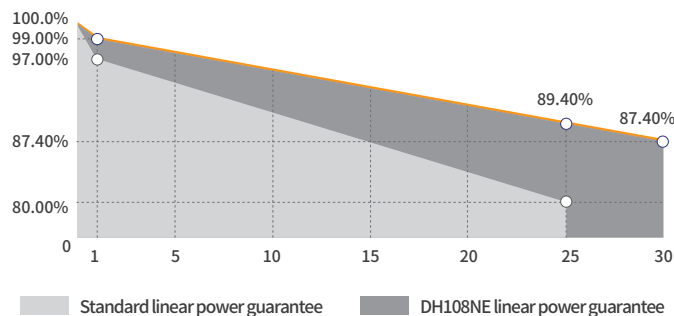


### Leading Product and Power Warranty

**1.00%** 1st-year Degradation **0.40%** Annual Degradation **25** Years materials and workmanship warranty **30** Years linear power warranty

## Engineering Drawing (MM)

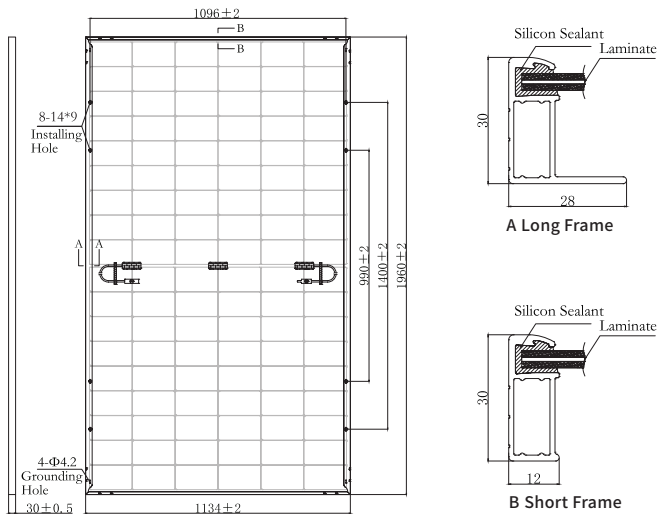

## Characteristic Curves(510W)

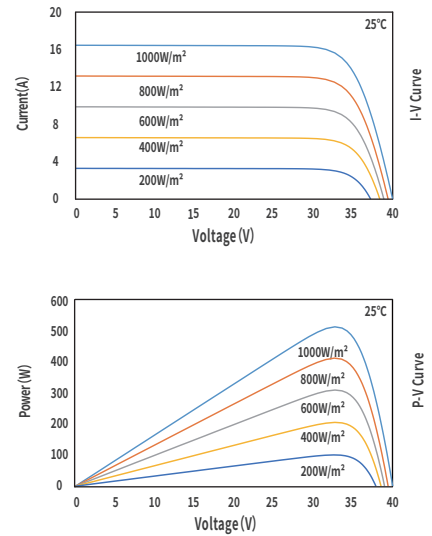

## Electrical Parameters (STC \*)

|                                 |          |
|---------------------------------|----------|
| Nominal Max. Power(Pmax/W)±3%   | 510      |
| Open Circuit Voltage(Voc/V)±3%  | 40.08    |
| Short Circuit Current(Isc/A)±5% | 16.17    |
| Operating Voltage(Vmp/V)        | 33.87    |
| Operating Current(Imp/A)        | 15.06    |
| Efficiency(%)                   | 22.9     |
| Isc-BSI                         | 19.98±5% |

STC \* : Irradiance = 1000 W/m², Cell Temperature = 25°C, AM = 1.5  
Test condition is based on the front side

## Mechanical Parameters

|                 |                                              |
|-----------------|----------------------------------------------|
| Cell Type       | N Type                                       |
| Module Size     | 1961×1134×30mm                               |
| Glass Thickness | 2.0mm + 2.0mm                                |
| Module Weight   | 27.1Kg                                       |
| Output Cable    | 4mm², cable length 1200mm(can be customized) |
| Connector       | See note                                     |
| Junction Box    | IP68, 3 bypass diodes                        |
| Frame           | Anodized aluminium alloy (Black)             |

Connector\*: 1.PV-DA01M2-XY / PV-DA02M2-XY (DAS Solar) 2.PV-ZH202B (Zhejiang Zhonghuan)  
3.PV-KST4-EVO2/xy\_UR,PV-KBT4-EVO2/xy\_UR (Staubli)  
4.PV-KST4-EVO2A/xy,PV-KBT4-EVO2A/xy (Staubli)  
5.PV-JK03M2/xy (Plug+Socket) (Jinko)

## Electrical Parameters (NMOT \*)

|                                 |       |
|---------------------------------|-------|
| Nominal Max. Power(Pmax/W)±3%   | 389   |
| Open Circuit Voltage(Voc/V)±3%  | 38.38 |
| Short Circuit Current(Isc/A)±5% | 13.03 |
| Operating Voltage(Vmp/V)        | 32.01 |
| Operating Current(Imp/A)        | 12.14 |

NMOT \*: Irradiance = 800 W/m², Ambient Temperature = 20°C, AM = 1.5,  
Wind Speed = 1 m/s  
Test condition is based on the front side

## Temperature Coefficients

|                            |            |
|----------------------------|------------|
| Short Circuit Current(Isc) | +0.045%/°C |
| Open Circuit Voltage(Voc)  | -0.250%/°C |
| Nominal Max. Power(Pmax)   | -0.280%/°C |
| NMOT                       | 42±2°C     |

## Electrical Parameters (BNPI \*)

|                                 |       |
|---------------------------------|-------|
| Nominal Max. Power(Pmax/W)±3%   | 560   |
| Open Circuit Voltage(Voc/V)±3%  | 40.08 |
| Short Circuit Current(Isc/A)±5% | 17.88 |
| Operating Voltage(Vmp/V)        | 33.87 |
| Operating Current(Imp/A)        | 16.66 |

BNPI \* : front irradiance=1000W/m², rear irradiance=135W/m²,  
Cell Temperature = 25°C, AM = 1.5  
Pmax bifaciality coefficient 80±5%, Voc bifaciality coefficient 95±5%  
Isc bifaciality coefficient 80±5%

## Operating Parameters

|                             |                                     |
|-----------------------------|-------------------------------------|
| Max. System Voltage         | DC1500V                             |
| Power Measurement Tolerance | ±3%                                 |
| Module[ T98] max[°C]        | 70                                  |
| Max. Fuse Rated Current     | 30A                                 |
| Fire Safety Class           | Class C                             |
| Test Load                   | Front 5400Pa , Back 2400Pa          |
| Packing Data                | 36 pcs/Pallet; 216(20GP); 936(40HQ) |